

SENCITY® Rondo SISO Antenna

1399.31.0004

Properties

- Indoor DAS omni-directional antenna for In-Building Coverage 698 MHz up to 3800 MHz
- AMPS, GSM, PCS, CDMA, UMTS, WiFi, WLAN 2.4, LTE
- ETL tested for Plenum space (UL 2043)
- Patented design



Electrical bands				
	Band 1	Band 2	Band 3	Band 4
Frequency	698 MHz ... 790 MHz	790 MHz ... 960 MHz	1710 MHz ... 2170 MHz	2170 MHz ... 2700 MHz
VSWR	1.5	1.5	1.5	1.5
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Gain	2 dBi	3 dBi	5.5 dBi	7 dBi
Ambient Temperature	55 °C			
Composite Power max	50 W			


	Band 5
Frequency	3400 MHz ... 3800 MHz
VSWR	1.5
Impedance	50 Ω
Gain	6 dBi
Ambient Temperature	
Composite Power max	

Electrical remarks	
IMD level	-155 dBc at carrier power 2x 43 dBm
Remarks	Gain specification defined without use of ground plane.

Ports	
	Port 1
Connector	4.3-10, jack (female)
Cable type	SUCOFORM_141_CU_CMP
Cable length	0.3 m
Polarization	vertical
DC grounded	Yes

SENCITY® Rondo SISO Antenna
1399.31.0004

Mechanical data	
Dimensions	87 mm x 238 mm (Heigth x Diameter)
Interface and material data	
Radome material	PC (Polycarbonate)
Radome colour	White
Back plate/base plate material	PCB_1
Environmental data	
Operation temperature	0 °C ... 55 °C
Storage temperature	-55 °C ... 85 °C
Transport temperature	-55 °C ... 85 °C
Environment (application)	Indoor
Flammability rating	UL 94-V0
Solar radiation	UL 746C, FI
Additional Information	
Radiator grounded for remote connectivity surveillance	
Outline drawing	

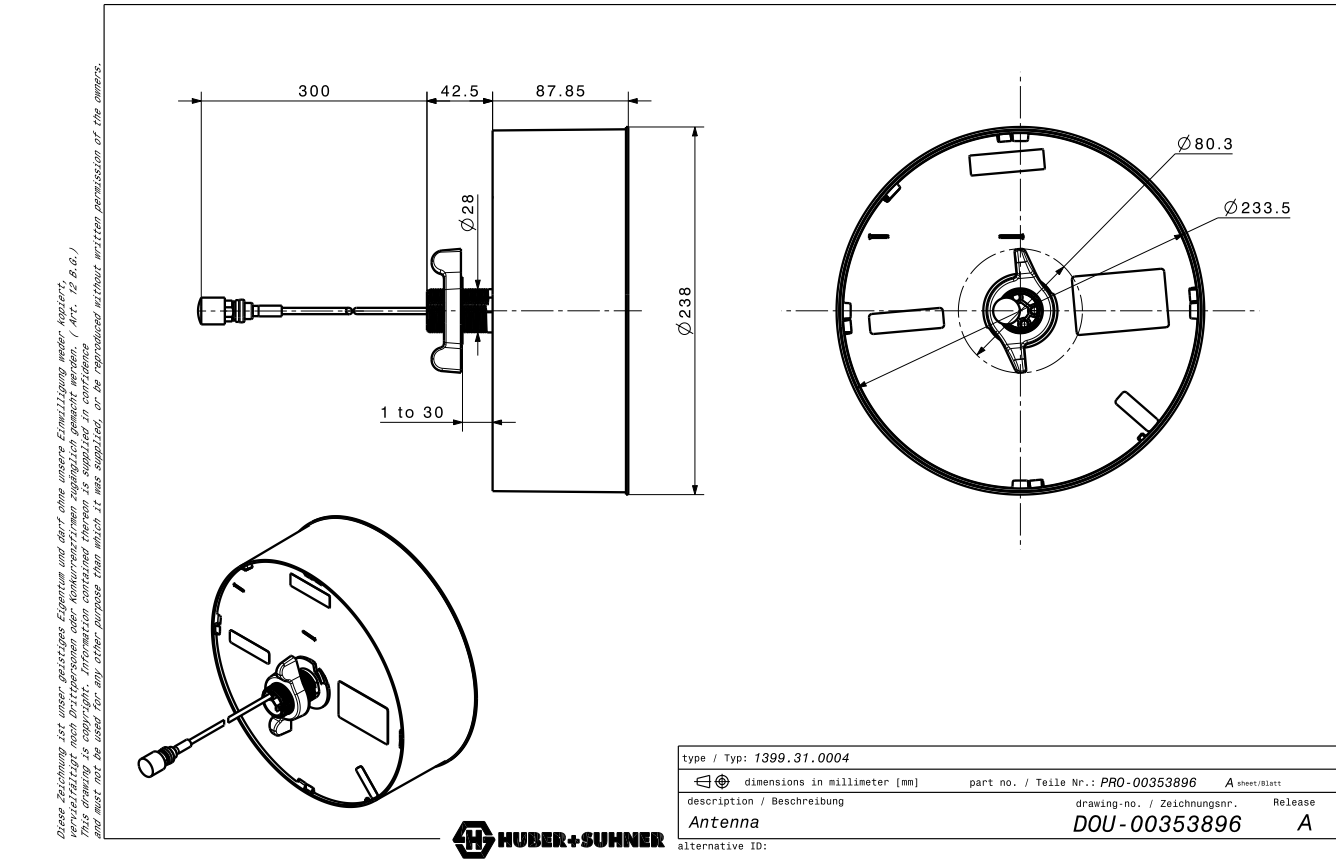

SENCITY® Rondo SISO Antenna

1399.31.0004

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3237 / Date of publication: 13.06.2024 / uncontrolled copy